

An ISO 9001:2015 Certified Co.



VISION TECH[®]
ELECTRONICS



PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR 2XTL-K 40W UVA-1 (FLEXO PRINT) LAMP (FOR MODEL: TL-K 40W UVA-1, G13-PHILIPS)


MODEL DESCRIPTION:

Ballast Body Type: UV4

LAMP: TL-K 40W UVA-1

Cap: G13



LAMP MAKE: PH (PHILIPS)

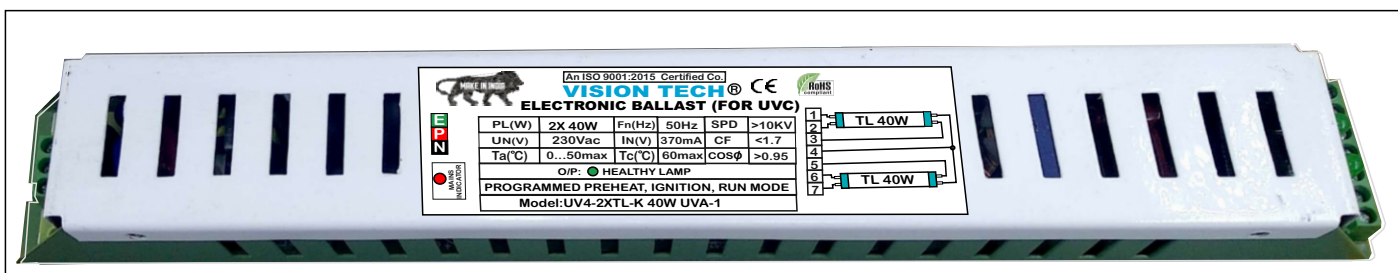

UV4: Dim. : LxBxH = 320mm x 40mm x 35mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR TL-K 40W UVA-1, G13
- BALLAST CONTROLLER IC IS PROGRAMMED TO PROVIDE AUTO PREHEAT, IGNITION & RUN MODE, WHICH ENSURES THE ENHANCED LIFE SPAN OF LAMP/TUBE
- OPERATING VOLTAGE RANGE: $U_n = 170V_{ac} - 300V_{ac}$
- MAINS RATED VOLTAGE: $V=230V_{ac}$
- MAINS FREQUENCY: $F_n(Hz)=50Hz$
- MAINS I/P CURRENT: $I_n=370mA$
- WATTAGE: 80W
- POWER FACTOR: $PF > 0.94$
- SURGE PROTECTION DEVICE: $SPD > 10KV$
- CREST FACTOR: $CF > 1.70$
- AMBIENT TEMPERATURE: $T_a=0...50\text{ }^{\circ}C(\text{max})$
- CASE TEMPERATURE: $T_c=60\text{ }^{\circ}C(\text{max})$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION

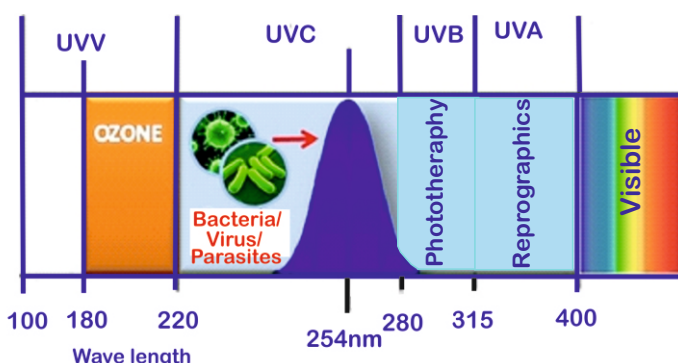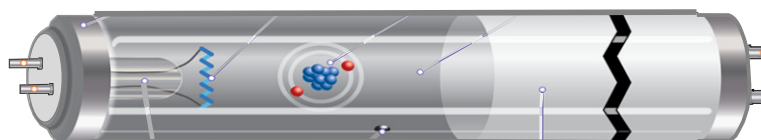

FEATURES:

- SLIM DESIGN
- BODY: METALLIC POWDER COATED
- MAINS LED INDICATOR: RED
- O/P GREEN LED INDICATORS SIGNIFY HEALTHY LAMPS/TUBES

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACILITY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,

O/S Dariyapur Darwaja, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com