

An ISO 9001:2015 Certified Co.




VISION TECH[®]
ELECTRONICS



PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR PLL 36W (NARROW BAND UVB) LAMP (FOR MODEL: UV2-PL-L 36W/01-2G11-PH)

MODEL DESCRIPTION:


Ballast Body Type: UV2
LAMP:PLL 36W/01 (NARROW BAND UVB)
Cap: 2G11
Make: PH (PHILIPS)

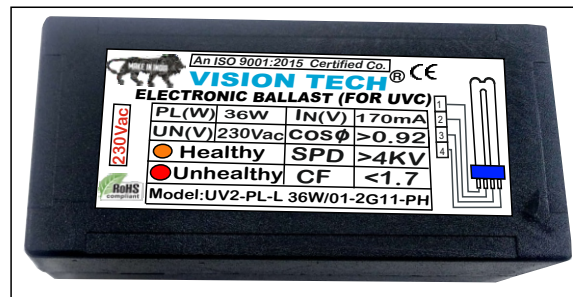

UV2: Dim. : LxBxH = 97mm x 46mm x 29mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR PL-L/36W/01
- OPERATING VOLTAGE RANGE: $U_n = 170\text{Vac} - 300\text{Vac}$
- MAINS RATED VOLTAGE: $V=230\text{Vac}$
- MAINS I/P CURRENT: $I_n=170\text{mA}$
- WATTAGE: 36W
- POWER FACTOR: $PF > 0.92$
- SURGE PROTECTION DEVICE: $SPD > 4\text{KV}$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: + 5%
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED INDICATOR:
 - WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
 - WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

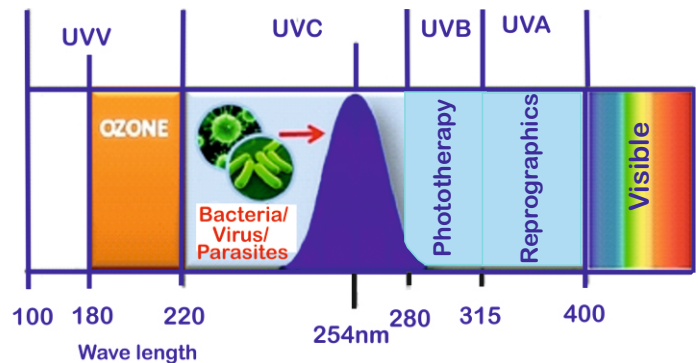

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,
O/S Dariyapur Darwaja, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com
www.vision-techs.com, www.visiontechled.com