

An ISO 9001:2015 Certified Co.



VISION TECH[®]
ELECTRONICS



PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR 11W/UVC TUBE/LAMP (FOR MODEL: UV1-11W/2G7-CGL-SD)

MODEL DESCRIPTION:



Ballast Body Type: UV1

Tube/Lamp: 11W/CGL

Cap: 2G7

Application: CGL (Compact Germicidal Lamp, UVC)

Make: SD (Sankyo Denki)

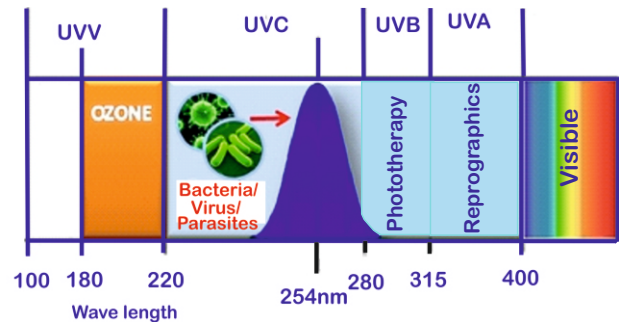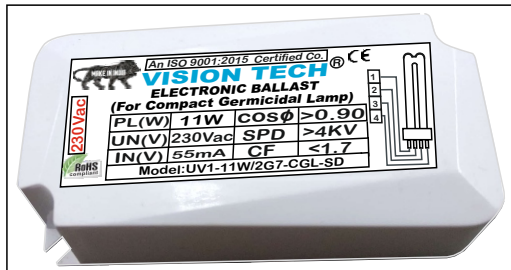

UV1: Dim. : LxBxH = 80mm x 39mm x 23mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR 11W/CGL, 2G7
- OPERATING VOLTAGE RANGE: $U_n = 170V_{ac} - 300V_{ac}$
- MAINS RATED VOLTAGE: $V=230V_{ac}$
- MAINS FREQUENCY: $F_n(Hz)=50Hz$
- MAINS I/P CURRENT: $I_n=55mA$
- WATTAGE: 11W
- POWER FACTOR: $PF > 0.90$
- SURGE PROTECTION DEVICE: $SPD > 4KV$
- CREST FACTOR: $CF < 1.70$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- TOLERANCE: $\pm 5\%$

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,
O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com
www.vision-techs.com, www.visiontechled.com