

An ISO 9001:2015 Certified Co.




VISION TECH[®]
ELECTRONICS



**PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR
35W (HIGH O/P UVC GERMICIDAL, H-SHAPE) LAMP (FOR MODEL: UV1-GHO35 T5/H, 2G11-ARKLITE)**

MODEL DESCRIPTION:

Ballast Body Type: UV1
Lamp Type: Preheat Start,
Lamp: High O/P UVC Germicidal, H-Shape Lamp
Cap: 2G11
Make: ARKLITE

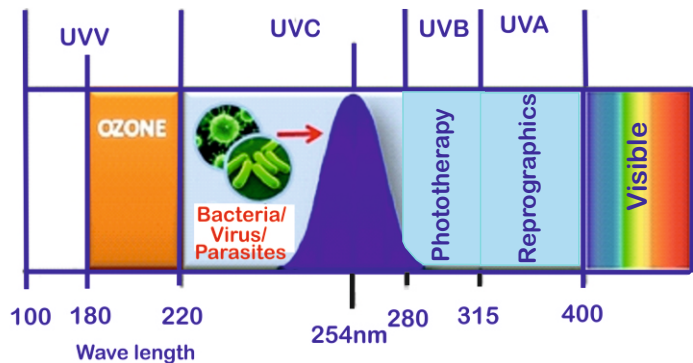

UV2: Dim. : LxBxH = 97mm x 46mm x 29mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR T5/21W/UVC
- OPERATING VOLTAGE RANGE: $U_n = 170V_{ac} - 300V_{ac}$
- MAINS RATED VOLTAGE: $V=230V_{ac}$
- MAINS I/P CURRENT: $I_n=170mA$
- WATTAGE: 35W
- POWER FACTOR: $PF > 0.90$
- SURGE PROTECTION DEVICE: $SPD > 4KV$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED INDICATOR:
 - WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
 - WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACILITY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,

O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com