




PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR 2XT5/76W(SOFT GLASS UVC) LAMP (FOR MODEL: UV5-LTC64T5SE 76W ,4P-SE, LIGHT SOURCES)

MODEL DESCRIPTION:


- Ballast Body Type: UV5
- Lamp:T5/75W (SOFT GLASS UVC GERMICIDAL LAMP)
- Cap:4P-SE (FOUR PINS, SINGLE ENDED)
- Make: LIGHT SOURCES

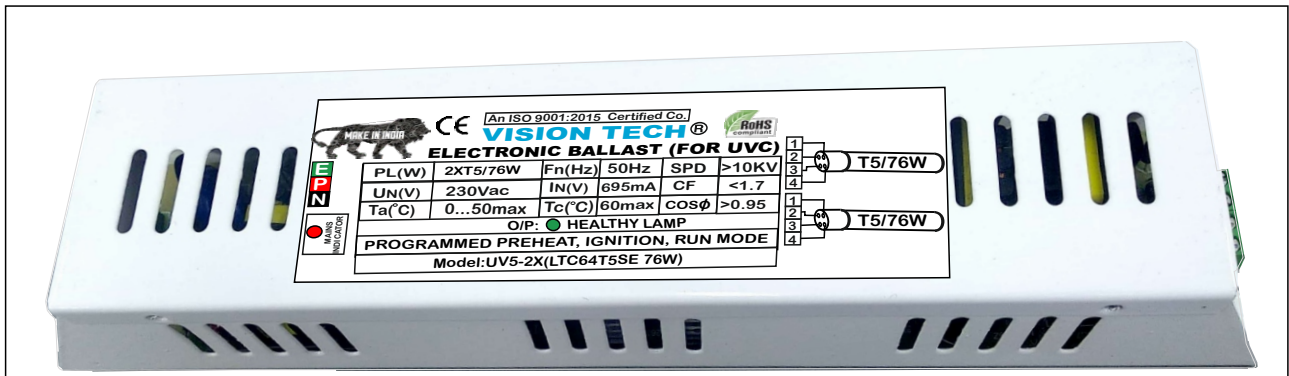

UV5: DIMENSION: L=278mm, W=55mm, H=42mm


TECHNICAL SPECIFICATIONS:

- TYPE: UVC ELECTRONIC BALLAST/INDUSTRIAL
- BALLAST CONTROLLER IC IS PROGRAMMED TO PROVIDE AUTO PREHEAT, IGNITION & RUN MODE, WHICH ENSURES THE ENHANCED LIFE SPAN OF LAMP/TUBE
- OPERATING VOLTAGE RANGE: Un = 170Vac - 300Vac
- MAINS RATED VOLTAGE: V=230Vac
- MAINS FREQUENCY:Fn(Hz)=50Hz
- MAINS I/P CURRENT: IN=695mA
- WATTAGE: 152W
- POWER FACTOR: PF > 0.95
- SURGE PROTECTION DEVICE: SPD > 10KV
- CREST FACTOR: CF>1.70
- AMBIENT TEMPERATURE: Ta=0...50°C(max), CASE TEMPERATURE: Tc=60°C(max)
- TOLERANCE: ± 5%
- IN RUSH CURRENT PROTECTION, RFI/EMI PROTECTION

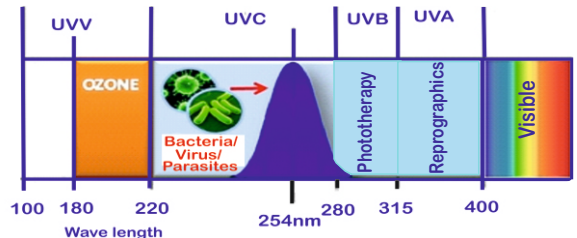

FEATURES:

- SLIM DESIGN
- BODY:METALLIC POWDER COATED
- MAINS LED INDICATOR:RED
- O/P GREEN LED INDICATORS SIGNIFY HEALTHY LAMPS/TUBES



***Due to continuous R&D, design can be changed without prior notification**

***Special Requirements will be entertained**

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,

O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com

www.vision-techs.com, www.visiontechled.com