


An ISO 9001:2015 Certified Co.




VISION TECH[®]
ELECTRONICS





PARAMETERS/TECHNICAL SPECIFICATIONS OF ELECTRONIC BALLAST FOR T5/40W (HIGH OUTPUT UVC GERMICIDAL) LAMP (FOR MODEL: UV2-GPH436-T5/HO/40W-ARKLITE)

MODEL DESCRIPTION:

Ballast Body Type: UV2
Lamp Type: GPH (Preheat Start)
Lamp Length: 436mm
Lamp: T5/HO/40W (HIGH O/P UVC)
Cap: G5 or 4P-SE (Four Pins, Single Ended)
Make: ARKLITE

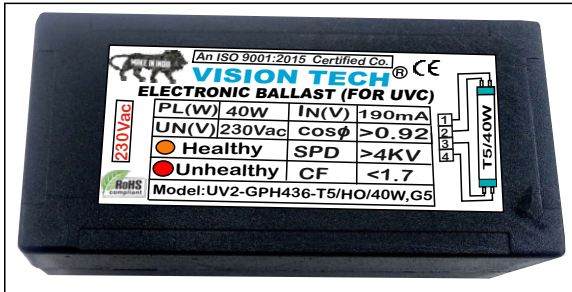


4P-SE

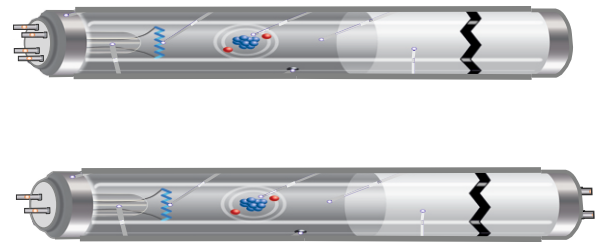

UV2: Dim. : LxBxH = 97mm x 46mm x 29mm

TECHNICAL SPECIFICATIONS:

- TYPE: UV ELECTRONIC BALLAST/INDUSTRIAL FOR GPH436 T5/HO/40W, G5 OR 4P-SE
- OPERATING VOLTAGE RANGE: $U_n = 170\text{Vac} - 300\text{Vac}$
- MAINS RATED VOLTAGE: $V=230\text{Vac}$
- MAINS I/P CURRENT: $I_n=190\text{mA}$
- WATTAGE: 40W
- POWER FACTOR: $PF > 0.92$
- SURGE PROTECTION DEVICE: $SPD > 4\text{KV}$
- CREST FACTOR: $CF < 1.70$
- TOLERANCE: $\pm 5\%$
- IN RUSH CURRENT PROTECTION
- RFI/EMI PROTECTION
- O/P DUAL LED INDICATOR:
 - WHEN INDICATOR IS ORANGE, SIGNIFIES HEALTHY TUBE/LAMP
 - WHEN INDICATOR IS RED, SIGNIFIES UNHEALTHY TUBE/LAMP

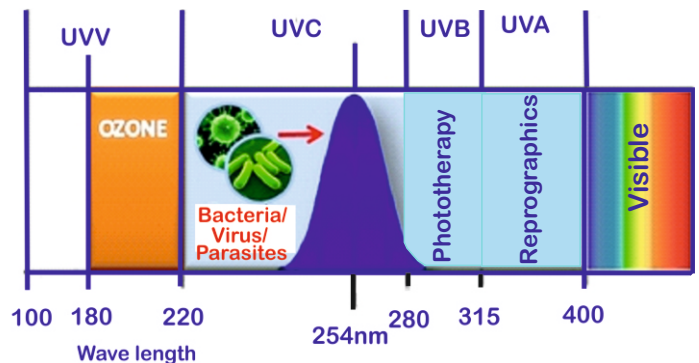

*Due to continuous R&D, design can be changed without prior notification

*Special Requirements will be entertained

WORKS/FACORY ADDRESS:

VISION TECH ELECTRONICS

C/9, Bansidher Estate, Bardolepura, opp. Suprabhat Industrial Estate,
O/S Dariyapur Gate, Ahmedabad-380004, Gujarat, India

M: 9925799688, E-mail Id: info@visiontechproducts.com, mukesh@visiontechproducts.com

Web Sites: www.uvballasts.com, www.visiontechproducts.com
www.vision-techs.com, www.visiontechled.com